

## Portable Data Logger

OM-SQ2020 Series  
Starts at

£1225



- ✓ 8 True Differential or 16 Single-Ended Universal Analogue Inputs for Voltage, Current or Resistance Measurements Plus 2 High Voltage, 4 Pulse and 8 Digital Event/State Inputs
- ✓ Analogue Inputs Can Be Used With Thermistors, Thermocouples, 2-, 3- or 4-Wire RTD Temperature Sensors and 4 to 20 mA Signals
- ✓ Logging Rates of Up to 100 Hz on Up to 2 Channels (On the OM-SQ2020-2F8)
- ✓ Large Non-Volatile Internal Memory Storage for Up to 1.8 Million Readings
- ✓ Ethernet (On the OM-SQ2020-2F8), USB and RS-232 Communication Ports
- ✓ Download of Internal Data to Removable MMC/SD (Multi-Media Card/Secure Digital) Memory
- ✓ Sensor Power and FET Outputs for Use With External Devices
- ✓ Easy-to-Read LCD and Simple 4 Push Button User Interface
- ✓ Up to 16 Calculated/Derived Channels Can Be Created Using Mathematical Functions

The OM-SQ2020 Series of hand held data loggers combines high performance, powerful features and universal inputs in a compact and easy-to-use instrument.

Using high accuracy 24-bit analogue to digital converters, removable memory and Ethernet networking (on the OM-SQ2020-2F8), the OM-SQ2020 Series is the ideal data logger for industrial, scientific research and quality assurance applications. Together with our comprehensive suite of software, the OM-SQ2020 provides standalone data acquisition, real-time metering and data analysis straight out-of-the-box.



OM-SQ2020-1F8 data logger, £1225, shown smaller than actual size

### Input Connections

The OM-SQ2020-1F8 data logger has a single analogue to digital converter (A/D) which corresponds to inputs on blocks A through to D. Each connection block will accept up to 2 differential inputs or up to 4 single ended inputs (it is not possible to mix single-ended and differential inputs on a block). The OM-SQ2020-2F8 data logger has two analogue to digital converters (A/D's) which increases logging flexibility over the OM-SQ2020-1F8 model. The first corresponds to inputs on blocks A and B and the second corresponds to inputs on blocks C and D. Each connection block will accept up to 2 differential inputs or up to 4 single-ended inputs (it is not possible to mix single ended and differential inputs on a block).

### Concurrent Sampling

The OM-SQ2020 Series uses multiple analogue to digital converters that enables true concurrent sampling and logging. This allows the user to configure a channel to log at a rate of 100 Hz (20 Hz on OM-SQ2020-1F8) while retaining different sample speeds on other channels. This

makes the OM-SQ2020 Series ideal for measuring dynamic parameters that change at different rates such as temperature and pressure.

### Communications

Ethernet (on OM-SQ2020-2F8), USB and RS-232 serial ports are built-in. This allows simple connection to either a PC based TCP/IP network, a wireless to PC connection or to a GSM modem for remote data downloading. This flexibility enables global data access and retrieval as well as complete system integration of the OM-SQ2020 series into complex and critical applications.

### Multiple Configurations Stored in the Data Logger

Up to six logger configurations (channel type, names, logging speeds, triggers etc), together with the current configuration, can be held in the logger's internal memory. Additional configuration settings can also be loaded from the external MMC/SD memory card. This allows the operator to quickly and easily switch between logger configurations without the need for a PC.

## Input Channels

Analogue Input Channel Options	OM-SQ2020-1F8	OM-SQ2020-2F8
Analogue to digital converters	1	2
Differential	8	8
Single ended	16	16
3 or 4 wire	0	4
<b>Additional Channels</b>		
Pulse	(2x fast—64 kHz) and (2 x slow—100 HZ)	(2x fast—64 kHz) and (2 x slow—100 HZ)
Event/Digital	8 state inputs of 1 x 8 bit binary	8 state inputs of 1 x 8 bit binary
High Voltage	2	2
Internal Channels	1 temperature	1 temperature

## Comprehensive Software Configuration

The OM-SQ-SOFT software (supplied with the OM-SQ2020 series data loggers) allows logger configuration, data download and data export while giving the user full control over the OM-SQ2020.

The optional OM-SQ-SOFT-PLUS software gives the user access to many advanced data analysis and data archiving/transfer features. The optional OM-SQ-SOFT-PLUS software lets you quickly and easily analyse the data from your OM-SQ2020 data logger in a familiar explorer style interface. Data can be displayed with 2 different auto scaling Y-axis. This is particularly useful when displaying widely varying data from different sensors on one graph.

You can also zoom in on areas of interest, use a cursor to pick out exact values, times and dates, get a statistical summary of your data, set high and low alarm thresholds and, using the calculation function, you can create new virtual channels from existing channels. The OM-SQ-SOFT-PLUS software also incorporates a report generation facility, which allows you to create custom report templates consisting of a title page with descriptive text, headers and footers, graphs, tabular list of data, statistics and data logger setup information.


Templates can be setup with any of these combinations and saves time when preparing similar presentations of data.

## Standard Ranges for dc Voltage

Each voltage channel can be any of the voltage ranges below. Mixed differential and single ended configurations are permitted. Please refer to our technical notes for the permitted combinations of inputs.

Voltage Range	Voltage Range	High Voltage Input Ranges*
-0.075 to 0.075V	-3.0 to 3.0V	4.0 to 20.0V
-0.15 to 0.15V	-6.0 to 6.0V	4.0 to 40.0V
-0.3 to 0.3V	-6.0 to 12.0V	4.0 to 60.0V
-0.6 to 0.6V	-6.0 to 25.0V	
-0.6 to 1.6V		
-0.6 to 2.4V		

\* Max of 2 may be selected

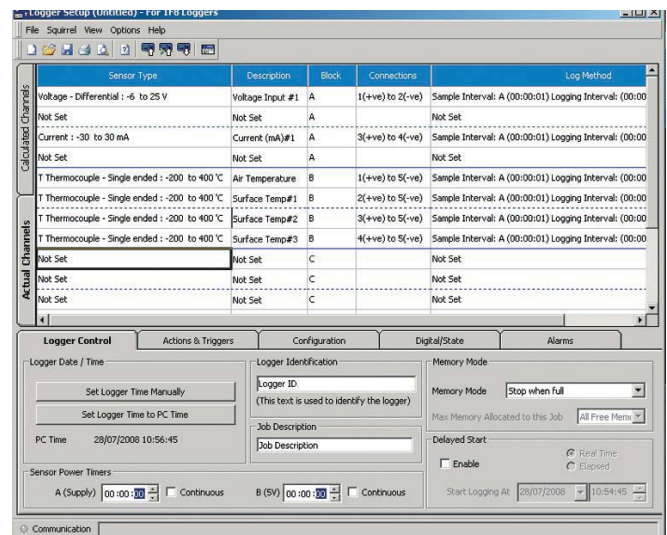

OM-SQ-SOFT Windows software (included with OM-SQ2020 data loggers) displays data in tabular format.

## Standard Ranges for Temperature Channels

Each channel can be individually set to any of the ranges listed: Pt100 to IEC751 and JIS1604 and Pt1000 to IEC751


Input Type	Range °C	Range °F
Y & U: Thermistor **	-50 to 150	-58 to 302
Pt100/P1000*	-200 to 850	-328 to 1562

\* 2 wire only on OM-SQ2020-1F8

\*\* or user-defined thermistor (enter Steinhart-Hart coefficients or RT pairs)

Thermocouple Type	Range °C	Range °F
K	-200 to 1372	-328 to 2501
T	-200 to 400	-328 to 752
J	-200 to 1200	-328 to 2192
N	-200 to 1300	-328 to 2372
R/S	-50 to 1768	-58 to 3214

**OM-SQ2020-1F8 data logger, rear view, £1225, shown smaller than actual size**

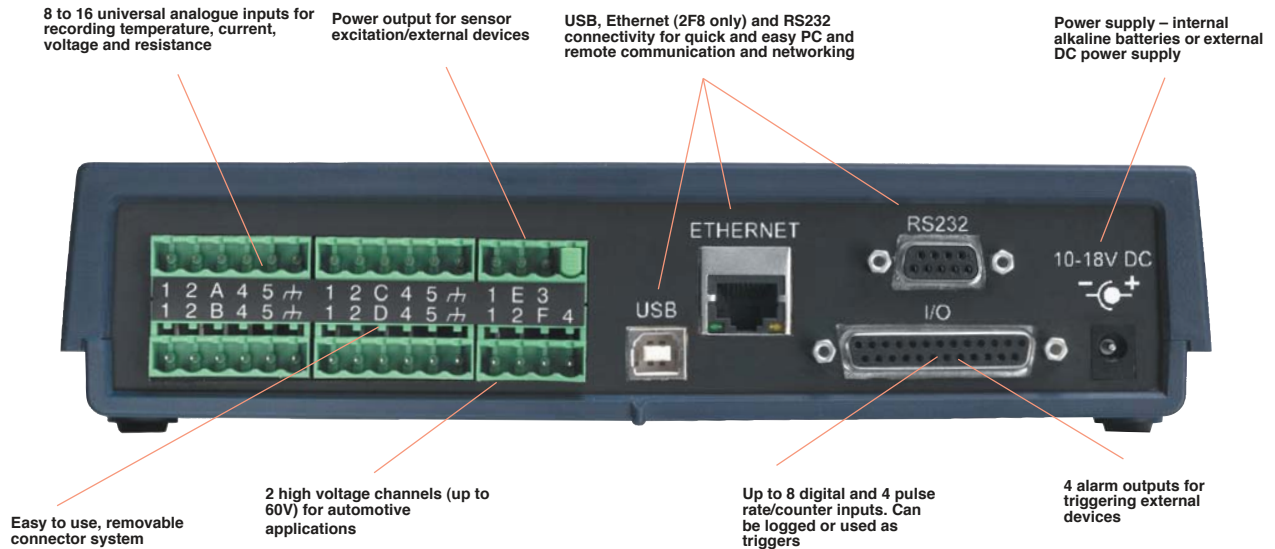

Input Channels	Accuracy @ 23°C
Differential voltage	±(0.025% of reading + 0.005% of full scale)
Single-ended voltage	±(0.025% of reading + 0.005% of full scale)
High voltage on block F	±(0.075% of reading + 5 mV)
Differential current	±(0.02% of reading + 0.015% of full scale)
2-wire and 3-wire resistance (above 500 Ω)	±0.1% of reading
4-wire resistance	±(0.05% of reading + 0.15 Ω)
2-wire and 3-wire temperature	±(0.1% of reading + 0.1% of full scale)
4-wire temperature	±(0.05% of reading + 0.05% of full scale)
Differential J, K and N thermocouples (above -50°C) *	±0.075% of full scale
Differential R, S and T thermocouples (above -50°C) *	±0.175% of full scale
Single-ended J, K and N thermocouples (above -50°C) *	±0.1% of full scale
Single-ended R, S and T thermocouples (above -50°C) *	±0.225% of full scale
Pulse count and rate	±(0.0011% of reading +1)

\* Includes cold junction compensation (CJC) error. Data logger held at constant temperature.

## Specifications

### ANALOGUE INPUTS

**Accuracy:** See table

**Common Mode Rejection:** 100 dB

**Input Impedance:**

>1 MΩ

**Linearity:** 0.015%

**Series Mode Line Rejection:**

50/60 Hz 100 dB

### ANALOGUE INPUT

**Connections:** Detachable screw terminal blocks

### ANALOGUE—DIGITAL CONVERSION Type:

Sigma-Delta

**Resolution:** 24-bit

**Sampling Rate:** Up to 10, 20\* or 100\* readings per second per ADC

\* With mains rejection off

### ALARM OUTPUTS

4 x open drain FET (18 V 0.1 A)

**Digital I/O Connections:** DB25F connector

### CALCULATED CHANNELS

Up to 16 virtual channels derived from physical input channels

### RESOLUTION

Up to 6 significant digits

### PROGRAMMING/LOGGER SETUP

OM-SQ-SOFT or

OM-SQ-SOFT-PLUS software

Software compatible

with WIN 98/2000/XP/VISTA

### COMMUNICATION


**Standard:** RS-232 (automatic baud rate selection to 115200 baud)  
Ethernet 10/100 base TCP/IP



# DATA LOGGERS



OM-SQ2020-1F8 data logger, £1225, shown smaller than actual size

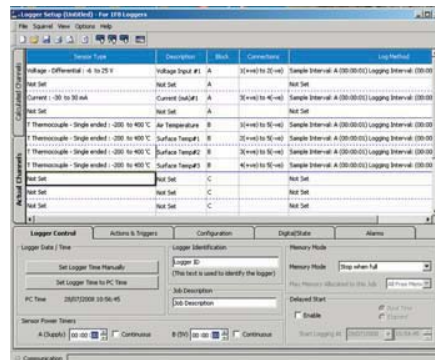

OM-SQ-SOFT Windows software (included with OM-SQ2020 data loggers) displays data in tabular format.

USB 1.1 and 2.0 compatible  
**External Options:** GSM, WIFI and PSTN Modems

**POWER SUPPLY**  
**Internal:** 6 "AA" alkaline batteries (included)  
**External:** 10 to 18 Vdc reverse polarity and over-voltage protected

**POWER CONSUMPTION @ 9V**  
**Sleep Mode:** 600  $\mu$ A  
**Logging:** 40 to 130 mA

**DISPLAY AND KEYPAD**  
 2 line x 20 character LCD display; battery state and external power indicator; keypad lock  
**Navigate to:**  
 Arm/disarm/pause/continue; meter any channel or alarm; select from up to 6 x pre-stored setups; status/diagnostics/memory/time and date; download to MMC/SD

**OPERATING ENVIRONMENT**  
**Temperature:** -30 to 65°C (-22 to 149°F)  
**Humidity:** 90% at 40°C non-condensing

**GENERAL**  
**Power Output for External Device:**  
 Regulated 5 Vdc at 50 mA or logger supply voltage at 100 mA  
**Time and Date:**  
 Built-in clock in 3 formats  
**Scaling Data:** Displays readings in preferred engineering units  
**Internal Memory:** 16 MB (Up to 1,800,000 readings)  
**External Memory:** Up to 1GB— removable MMC/SD (for transferring internal memory and storing setups only)  
**Dimensions:**  
 175 H x 235 W x 95 mm D (6.9 x 9.3 x 3.7")  
**Weight:** Approx. 1.2 kg (2.6 lb)  
**Enclosure Material:** ABS  
**Memory Modes (Internal Only):**  
 Stop when full or overwrite

## Standard Ranges for Current and Resistance Channels

Each current channel can be any of the current ranges below. Current ranges use differential input channels.

Current Range (External 10 $\Omega$ Shunt)	Resistance Range 2 Wire	Resistance Range 3 & 4 Wire (2F8 Version)
-30.0 to 30.0 mA	0.0 to 1250.0 $\Omega$	0.0 to 500.0 $\Omega$
4 to 20 mA	0.0 to 5000.0 $\Omega$	0.0 to 4000.0 $\Omega$
	0.0 to 20000.0 $\Omega$	
	0.0 to 300000.0 $\Omega$	

**AVAILABLE FOR FAST DELIVERY!**

## To Order (Specify Model Number)

Model No.	Price	Description
OM-SQ2020-1F8	£1225	Portable data logger with 1 fast channel
OM-SQ2020-2F8	1440	Portable data logger with 2 fast channels

Comes with OM-SQ-SOFT software, USB cable, wall bracket, 6 "AA" batteries, 6 input terminal blocks, 4 current shunt resistors and complete operator's manual.  
**Ordering Example:** OM-SQ2020-1F8, portable data logger with 1 fast channel and OM-SQ-SOFT-PLUS software and OMEGACARE 1 year extended warranty for OM-SQ2020-1F8 (adds 1 year to standard 1 year warranty), £1225 + 195 + 101 = £1521.

## Accessories

Model No.	Price	Description
OM-SQ-NET-ADAP	£180	Serial/ethernet converter kit
OM-SQ-GSM-KIT	299	GSM modem kit
OM-SQ-RF-ADAP	285	Wireless network adaptor
OM-SQ-UNIV-ADAP	38	Universal power pack
OM-SQ-UNIV-ADAP-1	48	Universal power pack with 1 m (3.2') flying lead
OM-SQ-CS	20	Spare current shunts (package of 4)
OM-SQ-SER-CABLE	15	OM-SQ data logger to PC serial port cable
OM-SQ-USB-CABLE	5	Spare OM-SQ data logger to PC USB port cable
OM-SQ-TB3	2	Spare 3-way terminal block with cable restraint
OM-SQ-TB4	3	Spare 4-way terminal block with cable restraint
OM-SQ-TB6	6	Spare 6-way terminal block with cable restraint
OM-SQ2020-CAL	180	Calibration certificate for OM-SQ2020
OM-SQ-SOFT-PLUS	195	OM-SQ2020 plus software
OM-SQ-SOFT-PLUS-LIC	350	OM-SQ2020 plus software multi-user license

# omega.co.uk<sup>®</sup>

Your One-Stop Source for Process Measurement and Control!

Freephone 0800 488 488 | International +44(0) 161 777 6622 | Fax +44(0) 161 777 6622 | Sales@omega.co.uk

[www.omega.co.uk](http://www.omega.co.uk)



#### UNITED STATES

[www.omega.com](http://www.omega.com)

1-800-TC-OMEGA

Stamford, CT.

#### CANADA

[www.omega.ca](http://www.omega.ca)

Laval(Quebec)

1-800-TC-OMEGA

#### GERMANY

[www.omega.de](http://www.omega.de)

Deckenpfronn, Germany

0800-8266342

#### UNITED KINGDOM

[www.omega.co.uk](http://www.omega.co.uk)

Manchester, England

0800-488-488

#### FRANCE

[www.omega.fr](http://www.omega.fr)

088-466-342

#### CZECH REPUBLIC

[www.omegaeng.cz](http://www.omegaeng.cz)

Karviná, Czech Republic

596-311-899

#### BENELUX

[www.omega.nl](http://www.omega.nl)

0800-099-33-44



## More than 100,000 Products Available!

### • Temperature

Calibrators, Connectors, General Test and Measurement Instruments, Handheld Instruments for Temperature Measurement, Ice Point References, Indicating Labels, Crayons, Cements and Lacquers, Infrared Temperature Measurement Instruments, Recorders, Relative Humidity Measurement Instruments, PT100 Probes, PT100 Elements, Temperature & Process Meters, Timers and Counters, Temperature and Process Controllers and Power Switching Devices, Thermistor Elements, Probes and Assemblies, Thermocouples, Thermowells and Head and Well Assemblies, Transmitters, Thermocouple Wire, RTD Probes

### • Flow and Level

Air Velocity Indicators, Doppler Flowmeters, Level Measurement, Magnetic Flowmeters, Mass Flowmeters, Pitot Tubes, Pumps, Rotameters, Turbine and Paddle Wheel Flowmeters, Ultrasonic Flowmeters, Valves, Variable Area Flowmeters, Vortex Shedding Flowmeters

### • pH and Conductivity

Conductivity Instrumentation, Dissolved Oxygen Instrumentation, Environmental Instrumentation, pH Electrodes and Instruments, Water and Soil Analysis Instrumentation

### • Data Acquisition

Auto-Dialers and Alarm Monitoring Systems, Communication Products and Converters, Data Acquisition and Analysis Software, Data Loggers Plug-in Cards, Signal Conditioners, USB, RS232, RS485 and Parallel Port Data Acquisition Systems, Wireless Transmitters and Receivers

### • Pressure, Strain and Force

Displacement Transducers, Dynamic Measurement Force Sensors, Instrumentation for Pressure and Strain Measurements, Load Cells, Pressure Gauges, Pressure Reference Section, Pressure Switches, Pressure Transducers, Proximity Transducers, Regulators, Pressure Transmitters, Strain Gauges, Torque Transducers, Valves

### • Heaters

Band Heaters, Cartridge Heaters, Circulation Heaters, Comfort Heaters, Controllers, Meters and Switching Devices, Flexible Heaters, General Test and Measurement Instruments, Heater Hook-up Wire, Heating Cable Systems, Immersion Heaters, Process Air and Duct, Heaters, Radiant Heaters, Strip Heaters, Tubular Heaters